


LAYOUT Specifications

HYDROWET 7

NOTE: THIS IS TO BE USED AS A GUIDE ONLY. THE MANUFACTURER RESERVES THE RIGHT TO AMEND SPECIFICATIONS WITHOUT PRIOR NOTICE

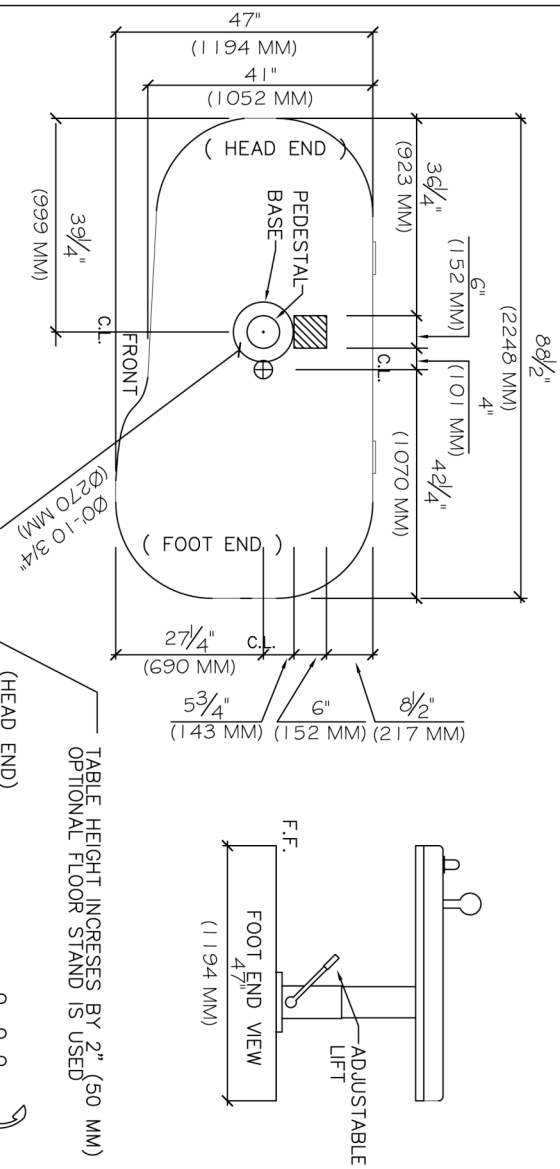


PLUMBING:

- HOT & COLD WATER SUPPLY LINES
- MAXIMUM PRESSURE: 145 PSI
- 2" FLOOR DRAIN
- ADDITIONAL 2" FLOOR DRAIN REQUIRED

NOTE:

- INSTALL IN ACCORDANCE WITH LOCAL AND NATIONAL CODE REQUIREMENTS
- SEE HYDROWET INSTALLATION & USER GUIDE (PROVIDED) BEFORE COMMENCING INSTALLATION OF WET TABLE / VICHY SYSTEM
- TABLE HEIGHT INCREASES BY 2" (50 MM) IF OPTIONAL FLOOR STAND IS USED
- UNITS WITH ADJUSTABLE LIFT REQUIRE FLEXIBLE HOT AND COLD WATER CONNECTION AND TELESCOPIC OR FLEXIBLE DRAIN CONNECTION 1 1/4" (300MM STROKE)

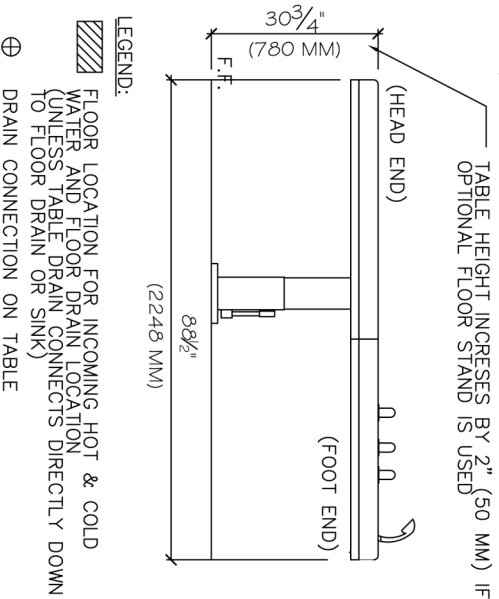

LEGEND:

- FLOOR LOCATION FOR INCOMING HOT & COLD WATER AND FLOOR DRAIN LOCATION (UNLESS TABLE DRAIN CONNECTS DIRECTLY DOWN TO FLOOR DRAIN OR SINK)
- ⊕ DRAIN CONNECTION ON TABLE

Updated: 20 October 2004