


# LAYOUT Specifications

## HYDROTONE A TUB

**NOTE:** THIS IS TO BE USED AS A GUIDE ONLY. THE MANUFACTURER RESERVES THE RIGHT TO AMEND SPECIFICATIONS WITHOUT PRIOR NOTICE

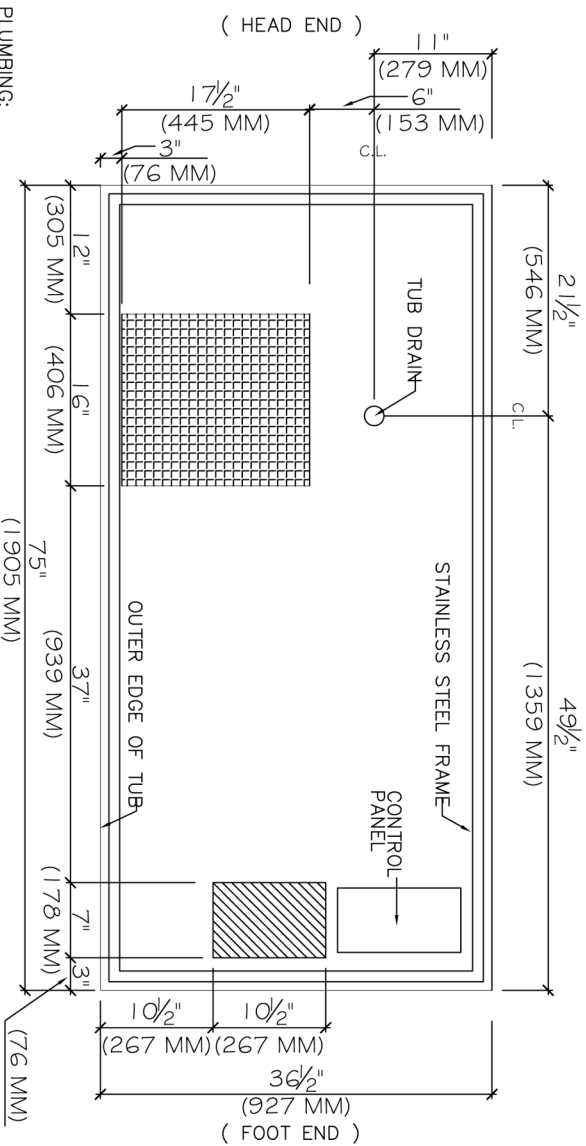

### PLUMBING:

- 3/4" HOT & COLD WATER SUPPLY LINES
- MAXIMUM PRESSURE: 145 PSI
- 2" FLOOR DRAIN
- 1/2" WATER SUPPLY LINES AND 1 1/2" DRAIN (WILL RESULT IN SLOW FILL & DRAIN OF) TUB

### ELECTRICAL:

- 208 - 240 VOLT 50/60 HZ 20 AMP SINGLE PHASE ELECTRICAL SUPPLY REQUIRED
- INSTALL ON DEDICATED LINE WITH DISCONNECT ALL POLE CLASS "A" GFCI THE SBSG MODEL # LC220 -D RECOMMENDED
- ALTERNATIVE MODELS HAVE DEMONSTRATED NUISANCE TRIPPING
- OBTAIN SBSG (GFCI) GROUND FAULT CIRCUIT INTERRUPTER FROM ELECTRICAL SUPPLIER OR HYDROCO
- GFCI - INTERNATIONALLY KNOWN AS (ELCB)
- EARTH LEAKAGE CIRCUIT BREAKER

### LEGEND:

-  FLOOR DRAIN LOCATION (UNLESS INCLUDED FLOOR TRAP IS NOT USED AND TUB DRAIN CONNECTS DOWN TO FLOOR DRAIN OR SINK)
-  FLOOR TRAP PLUS ELECTRICAL SUPPLY

### NOTE:

- 2" (50 MM) CLEARANCE IS AVAILABLE UNDER TUB FOR PLUMBING & ELECTRICAL ROUTING
- METAL PLUMBING PIPES & FITTINGS MUST NOT CONTACT TUB'S METAL SUPPORT FRAMEWORK
- INSTALL IN ACCORDANCE WITH LOCAL AND NATIONAL CODE REQUIREMENTS
- SEE HYDROTONE INSTALLATION & USER GUIDE (PROVIDED) BEFORE COMMENCING INSTALLATION OF TUB

Updated: 20 October 2004